




Seurat

AG1115



Principal part numbers

Lumens*	L (mm)	A (mm)	T (K)	Designation	Optics	Part No.	Cons. (W)
ON-OFF versions							
3000K version							
1500	900	280	3000	SEURAT 1500-830		1316 0010	15
4000K version							
1500	900	280	4000	SEURAT 1500-840		1316 0020	15
ON-10% versions**							
3000K version							
1500	900	280	3000	SEURAT 1500-830 MV10		1316 0030	15
4000K version							
1500	900	280	4000	SEURAT 1500-840 MV10		1316 0040	15



* Light output of the luminaire

** The function is activated by an external sensor, a timer or a twilight switch (not provided)

Specifications

Technical data	
Light source	<ul style="list-style-type: none"> High-efficiency removable LED modules (155lm/W, IRC>80, 3 SDCM) 50 000 h L80/B10 at max. operating temperature
Optics	<ul style="list-style-type: none"> Special satin-finish housing for LED Light mixing chamber
Light comfort	Brightness management using a satin-finish housing
Photobiological hazard	Group 0
Heat management	Passive heat sink in aluminium
Control gear	<ul style="list-style-type: none"> ON-OFF version: constant current driver (non-dimmable) ON-10% version: standby mode 10% managed by external sensor
Rapid installation	
Connection	<ul style="list-style-type: none"> With nickel-coated brass cable gland for cable Ø 5 - 10 mm To a 2 x 2,5 mm² fixed terminal block for ON-OFF versions To a 3 x 2,5 mm² fixed terminal block for ON-10% versions Installation in vertical position: cable gland positioned downwards
Closing	<ul style="list-style-type: none"> Closing by tightening the nut on the cable gland Housing with reinforced imperviousness by radial expansion of the sealing
Fixing	2 stainless steel fixing straps with HSHC screw (with variable centre distance)
Easy maintenance	
LED engine maintenance	<ul style="list-style-type: none"> Opening by loosening the nut beneath the cable gland Easily removable LED modules and driver
Materials and finishing	
Housing	Co-extruded polycarbonate/PMMA for outdoor use
End caps, fixing straps, ...	304L stainless steel
Gaskets	Moulded EPDM gaskets
Unit cover	Rolled 304L stainless steel

Tubular impervious amenity light fitting	
Light output	1500 lm
Length	900 mm

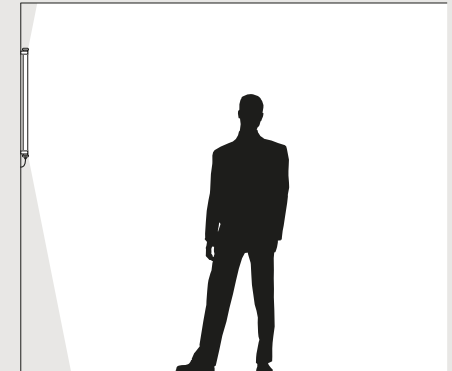

Technical data

Power supply	220-240 V 50/60 Hz
Electrical class	Class II
Operating temperature	-25 °C to +35 °C
Imperviousness	IP66, IP68 and IP69K
Shock resistance	IK10
Fire resistance	650 °C



Options

Fixings	
Fixing straps with tamper-resistant Torx screw	BAVT
Finishings	
316L stainless steel	MR